


Adjustable Basketball Hoop Anchor

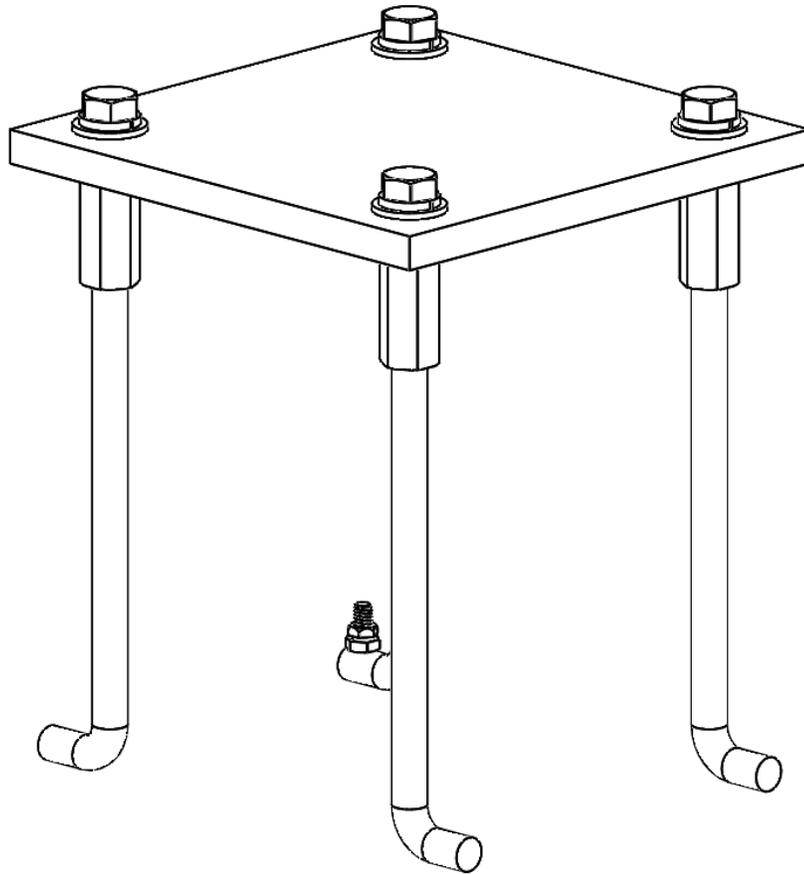

**Owner's Manual
Assembly, Installation and Operation**

Installation Instructions

Step 1: Determine where on the pool deck you want your basketball hoop to be. Make a mark on the deck edge at the selected location. Next, make a mark at the anchor location of the hoop (anchor can be setback up to 29" from pool wall to anchor centerline).

Step 2: Using a jackhammer or concrete saw, knock out a 14"-18" diameter hole in the concrete at the point of the second mark. The hole depth should be at least 42".

Step 3: Attach a wire to the grounding lug on one of the anchor legs. Lower the anchor into the hole and attach the other end of the wire to the bonding grid in order to ground the hoop. Consult with an electrician or your local code regarding grounding requirements or alternate methods of bonding.

Step 4: Align the anchor template with the pool edge. The top of the anchor plate should be flush with the pool deck and level.

Step 5: Fill in hole with a minimum of 4000 p.s.i. concrete. Allow concrete to cure for at least 48 hours before installing basketball hoop.