
Please fill out entire MG before submitting

DIVE STAND SPEC OPTIONS			
LENGTH	OVERHANG	BOARD	
□10'	30"	□OLYMPIAN (ALUMINUM)	
□12' (SHOWN)	48"	☐ FRONTIER III (FIBERGLASS)	
□14'	60"	□MAXIFLEX	
□16'	72"	□DURAFLEX	
PEDESTAL ANCHORING		STEP ENRTY	
□STANDARD CAGE		□ LEFT	
□SHALLOW CAGE		□RIGHT	
□ FLANGE MOUNT (\$\$\$)		□REAR (SHOWN)	
LADDER ANCHORS		FINISH	
□ REAR ANCHOR KIT		□ PASSIVATE IAW ASTM A967	
□FLANGED		□ POWDER COAT	
		COLOR	
BOARD LIFTER		PANEL INFILL	
□ 45 DEGREE		□ 1/2" POLYCARBONATE	
□ 90 DEGREE		□ NETTING	
□ 45 & 90 DEGREE			
RAIL DIA	METER	EXTENDABLE HANDRAILS	
□1.50"		□ YES	
□1.90"		□ NO	



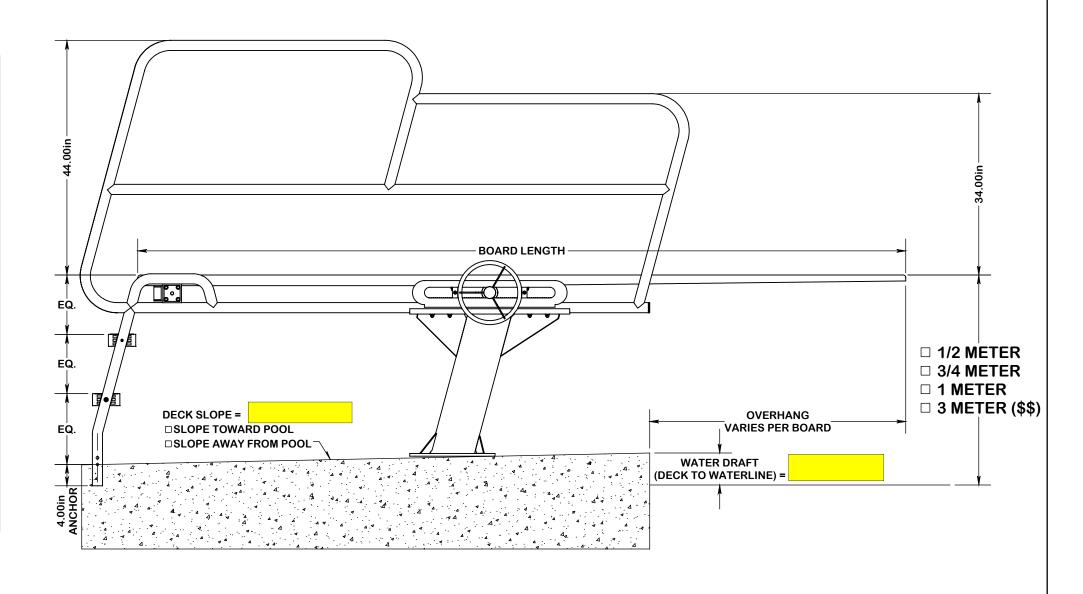

7100 Spectrum Lane 800.791.8056 Missoula, Montana 59808 www.spectrumproducts.com

ENGINEERING DATA

PRODUCT:	ADJUSTABLE DIVESTAND MG -		
MODEL #:	DIVESTAND MG	REVISION:	Α
MATERIAL:	304L SERIES STAINLESS STEEL		
FINISH #:	600 GRIT		

NOTE:

DIMENSIONS VARY WITH SPECIFIC APPLICATIONS. SPECIFICATIONS ARE NOMINAL AND ARE SUBJECT TO CHANGE. PLEASE CONTACT SPECTRUM AQUATICS FOR CUSTOM APPLICATIONS