


DIVE STAND SPEC OPTIONS		
LENGTH	OVERHANG	BOARD
☐ 10'	30"	☐ OLYMPIAN (ALUMINUM)
☐ 12' (SHOWN)	48"	☐ FRONTIER III (FIBERGLASS)
☐ 14'	60"	☐ MAXIFLEX
☐ 16'	72"	☐ DURAFLEX
PEDESTAL ANCHORING		STEP ENRTY
☐ STANDARD CAGE		☐ LEFT
☐ SHALLOW CAGE		☐ RIGHT
☐ FLANGE MOUNT (\$\$\$)		☐ REAR (SHOWN)
LADDER ANCHORS		FINISH
☐ REAR ANCHOR KIT		☐ PASSIVATE IAW ASTM A967
☐ FLANGED		☐ POWDER COAT COLOR _____
BOARD LIFTER		PANEL INFILL
☐ 45 DEGREE		☐ 1/2" POLYCARBONATE
☐ 90 DEGREE		☐ NETTING
☐ 45 & 90 DEGREE		☐ NONE
RAIL DIAMETER		EXTENDABLE HANDRAILS
☐ 1.50"		☐ YES
☐ 1.90"		☐ NO

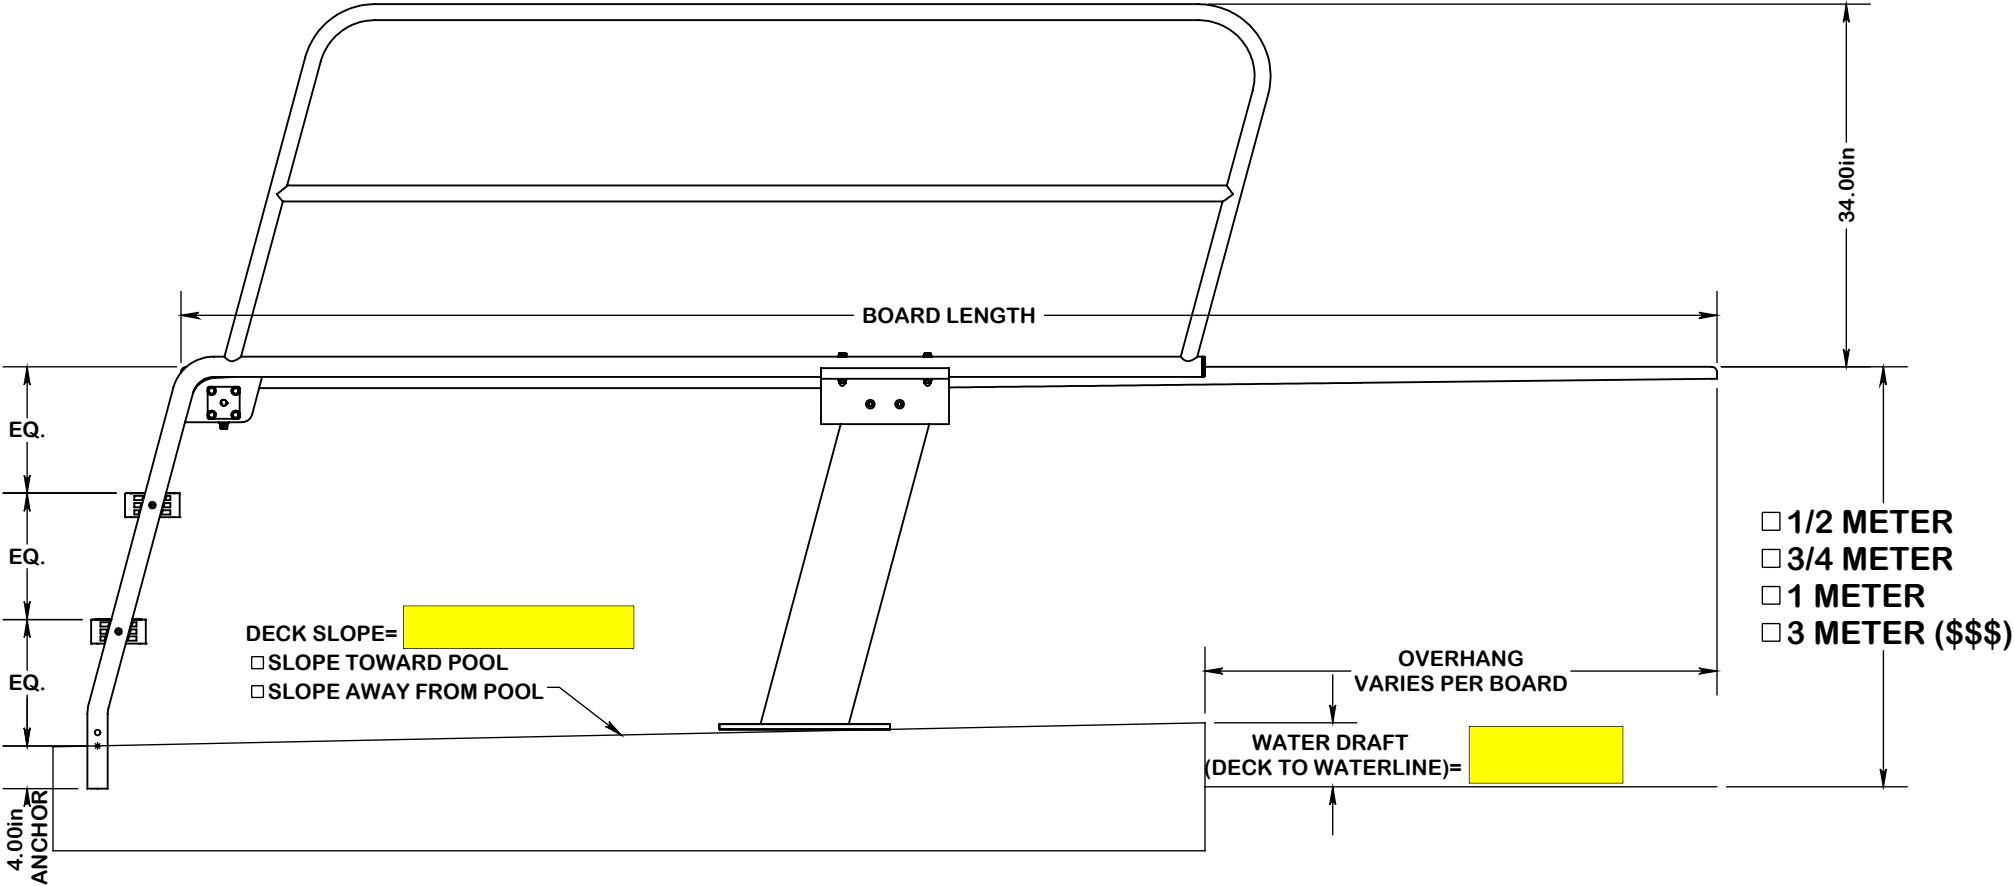

SPECTRUM

AQUATICS

A PLAYCORE Company

7100 Spectrum Lane

800.791.8056

Missoula, Montana 59808

www.spectrumproducts.com

ENGINEERING DATA			
PRODUCT:	1M Divestand-Fixed - 6" WD - 14' S.R. Smith Rear		
MODEL #:	DIVESTAND MG FIXED FULCRUM	REVISION:	A
MATERIAL:	304L STAINLESS STEEL		
FINISH #:	600 GRIT		

NOTE:
⚠ DIMENSIONS VARY WITH SPECIFIC APPLICATIONS. SPECIFICATIONS ARE NOMINAL AND ARE SUBJECT TO CHANGE. PLEASE CONTACT SPECTRUM AQUATICS FOR CUSTOM APPLICATIONS