

2.375" Surface Mount Lift Anchor, part number 75521

The Surface Mount Anchor shall support a 2.375" O.D. stainless steel lift mast making it suitable for Motion Trek lifts as well as assorted older lifts.

Anchor Body

The anchor body shall be fabricated from 304L series stainless steel. The baseplate shall be 3/8" 304L series stainless steel plate. The gussets shall be 3/16" 304L series stainless steel plate. The anchor tube shall be 3.00"x.109" 304L series stainless steel tubing. The tube shall be sleeved with uhmw and the ID shall be precision bored to ensure precise dimensions and tolerances.

The anchor plate shall have 5/8" holes suitable for 1/2" hardware.




The anchor shall be 6 3/8" tall and shall be 2.375" inside diameter. Dimensional tolerances shall be within 0.007" ensuring a secure fit for 2.375" O.D. tubing.

Bonding

The bonding screw shall be a 1/4 - 20 x 3/4" stainless hex head screw with the appropriate lock washer and nut welded to one of the gussets as indicated in the included drawing.

Warranty

Please see the Spectrum Standard warranty at www.spectrumproducts.com

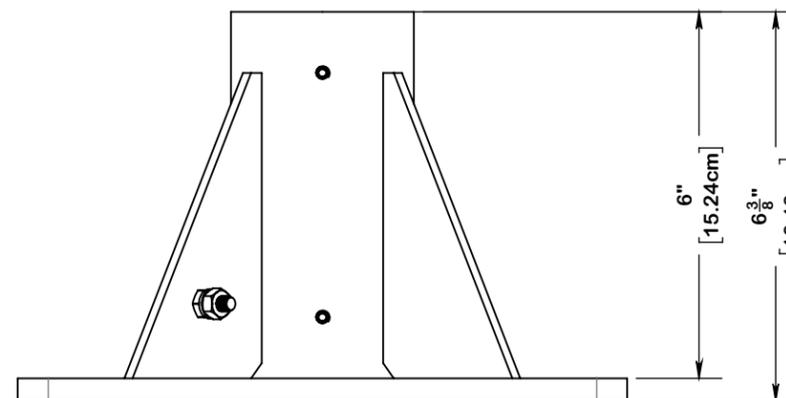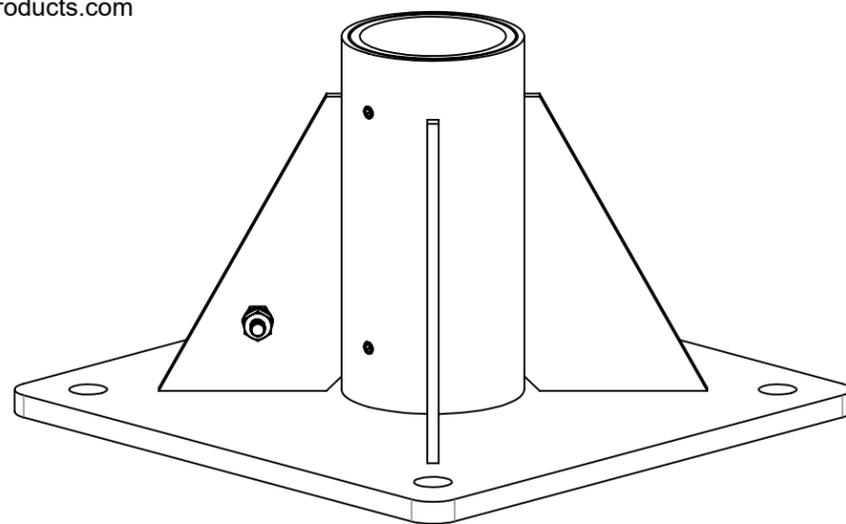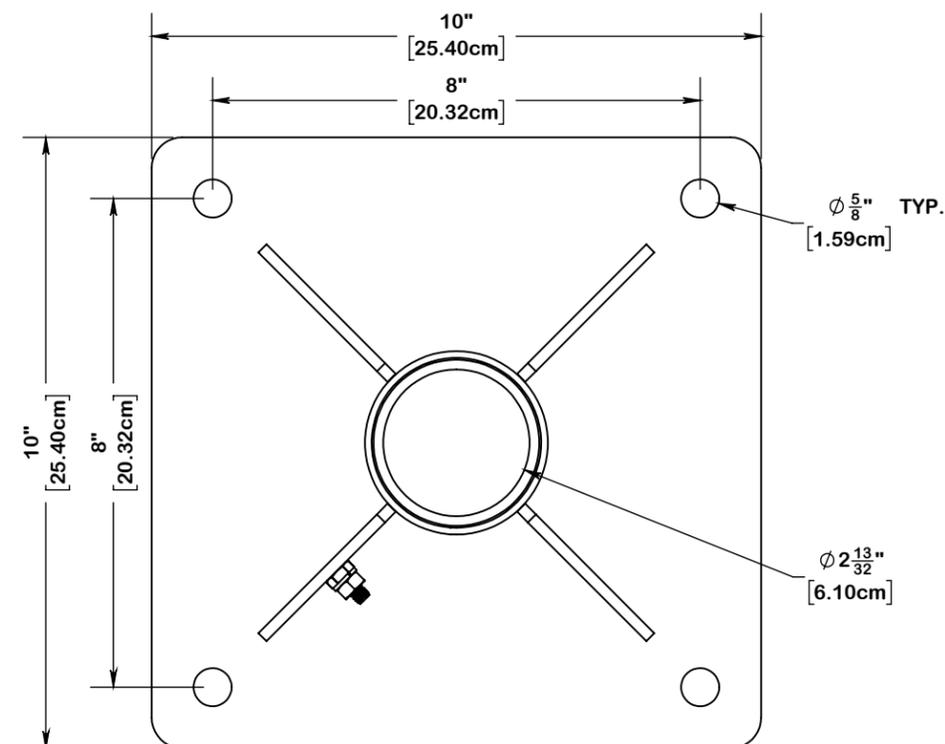

A PLAYCORE Company

7100 Spectrum Lane Missoula, Montana 59808
800.791.8056 www.spectrumaquatics.com

ENGINEERING DATA

PRODUCT:	SURFACE MOUNT ANCHOR 6" - 2.393" SLEEVE I.D.		
MODEL #:	75521	CATALOG #:	75521
MATERIAL:	304L STAINLESS STEEL		
FINISH #:	PASSIVATE IAW ASTM A967		
REVISION:	A		

NOTE:

△ DIMENSIONS VARY WITH SPECIFIC APPLICATIONS. SPECIFICATIONS ARE NOMINAL AND ARE SUBJECT TO CHANGE. PLEASE CONTACT SPECTRUM AQUATICS FOR CUSTOM APPLICATIONS