Anchor - Single Post 2 Part Number 21700-02

Anchor Body

The anchor shall be fabricated from bronze and 300 series stainless steel. The anchor body shall be machined from bronze bar stock and shall be 3 ½" (8.89cm) O. D. x 2 ½" (6.35cm) I. D. Two (2) 7/16" (1.11cm) diameter slots shall be machined into the top surface of the anchor to serve as the starting platformlocating index. The bottom plate of the anchor shall be stainless steel and shall be bolted in place. A flat shall be machined on one side of the anchor body providing anti-rotation protection.


Plug


A stainless steel slip cap shall be provided. The welded portion of the cap shall be of the MIG type and applied using type 308-welding rod for corrosion resistance. The cap will fill the anchor opening when the starting platform in not in use. A stainless steel cap removal tool shall be provided.


Bonding


A bonding screw shall be provided. The bonding screw will be 18-8 stainless steel.

Warranty

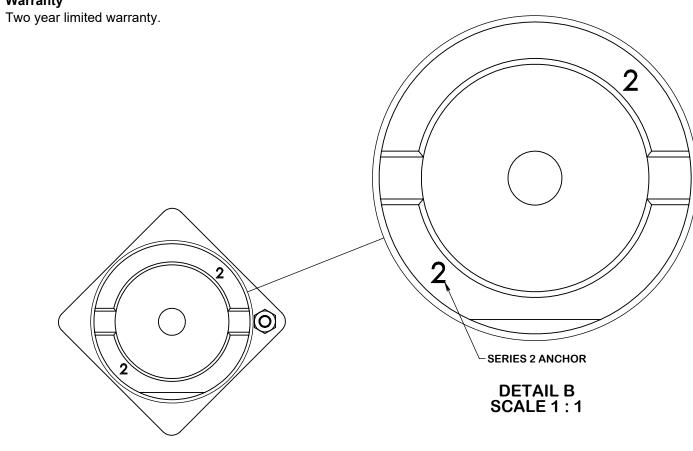

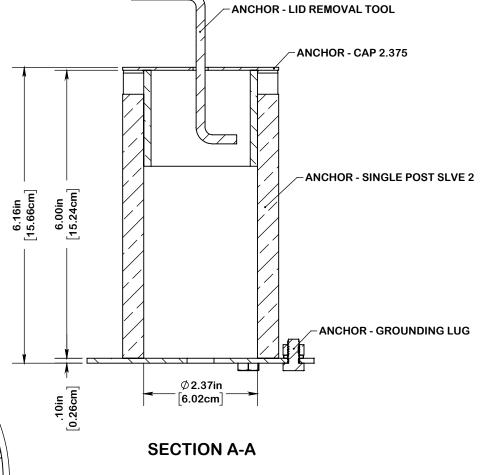



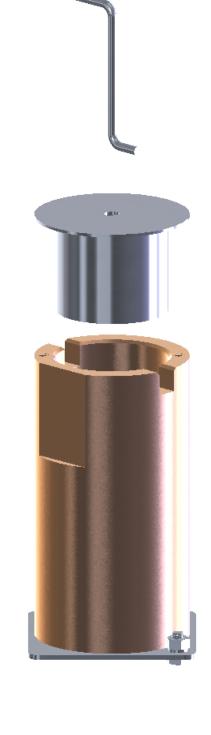



A PAYCORE Company Missoula, Montana 59808 7100 Spectrum Lane 800.791.8056 www.spectrumaquatics.com

ENGINEERING DATA

PRODUCT: ANCHOR - SP 2 -CATALOG #: 21700 MODEL #: 21700 REVISION: MATERIAL BRONZE - STAINLESS STEEL N/A FINISH #.

DIMENSIONS VARY WITH SPECIFIC APPLICATIONS. SPECIFICATIONS ARE NOMINAL AND ARE SUBJECT TO CHANGE. PLEASE CONTACT SPECTRUM AQUATICS FOR CUSTOM APPLICATIONS