


PLAN

NOTES:

1. LOCATION OF FRAME BASE ANCHORS WITHIN AREA SHOWN. NO CLOSER THAN 1'-0" TO FRONT EDGE OF PAD.
2. MIN. 8'x6' UNCRACKED SOLID AREA OF CONCRETE REQUIRED AT FRAME LOCATION. AREA SHALL BE UNINTERRUPTED BY ANY JOINTS.
3. 8'-0" WIDTH TO BE CENTERED ON ZIP'N FRAME.
4. MIN. THICKNESS OF 4" REQUIRED FOR CONCRETE SLAB WITH 6X6 W2.0 WELDED WIRE MESH ASTM A185
5. IF CONCRETE AREA IS NEW, MINIMUM CONCRETE STRENGTH OF 3000 PSI AT 28 DAYS IS REQUIRED.
6. MIN OF 4" THICK SLAB AREA BASED ON MAX. RIDER WEIGHT.

MAX. RIDER WEIGHT	WIDTH (MIN)
150 LBS	6 FT
200 LBS	7 FT
250 LBS	8 FT

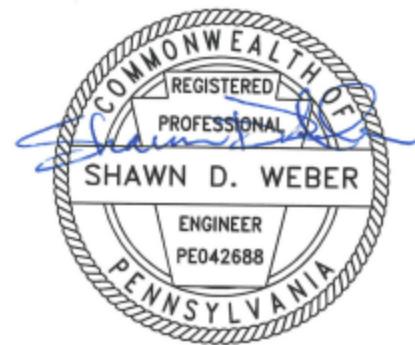

CONCRETE PAD PLAN & NOTES

ZIP'N PROTOTYPE

AQUACLIMB PYRAMIDE, USA INC.
8 E. SECOND ST. #203B
FREDERICK, MD. 21701

DATE:
06/18/2020

SCALE:
NOT TO SCALE

SK-1