

Lifeguard platform, 4-Foot Marshall, part number 36533

The lifeguard platform shall consist of the following components:

Lifeguard Platform Frame

The lifeguard platform frame is to be fabricated of 1.90" O.D. x 0.065" wall thickness 304L stainless steel. All joints are to be secured using bolt through, 300 series stainless steel split tees. Four (4)-non-marking rubber bumpers are to be provided.

Steps



Three (3), 15-degree step treads shall be provided. They shall be 22" wide, have an integral non-slip top surface, and shall be injection molded using U.V. stabilized ABS plastic.

Seat Assembly

The seat shall be 18" high, 18" wide and 17 ¾" deep and shall be a double contour design for prolonged seating comfort. Closed cell, UV protected, foam padding shall be provided. The seat shall fold down when not in use to keep seat surface cool and retard use by unauthorized individuals. Fold down shall be a "No-Pinch" hinge with stainless-steel hinge pins. The seat assembly shall be white in color.

Warranty

Two year limited warranty.

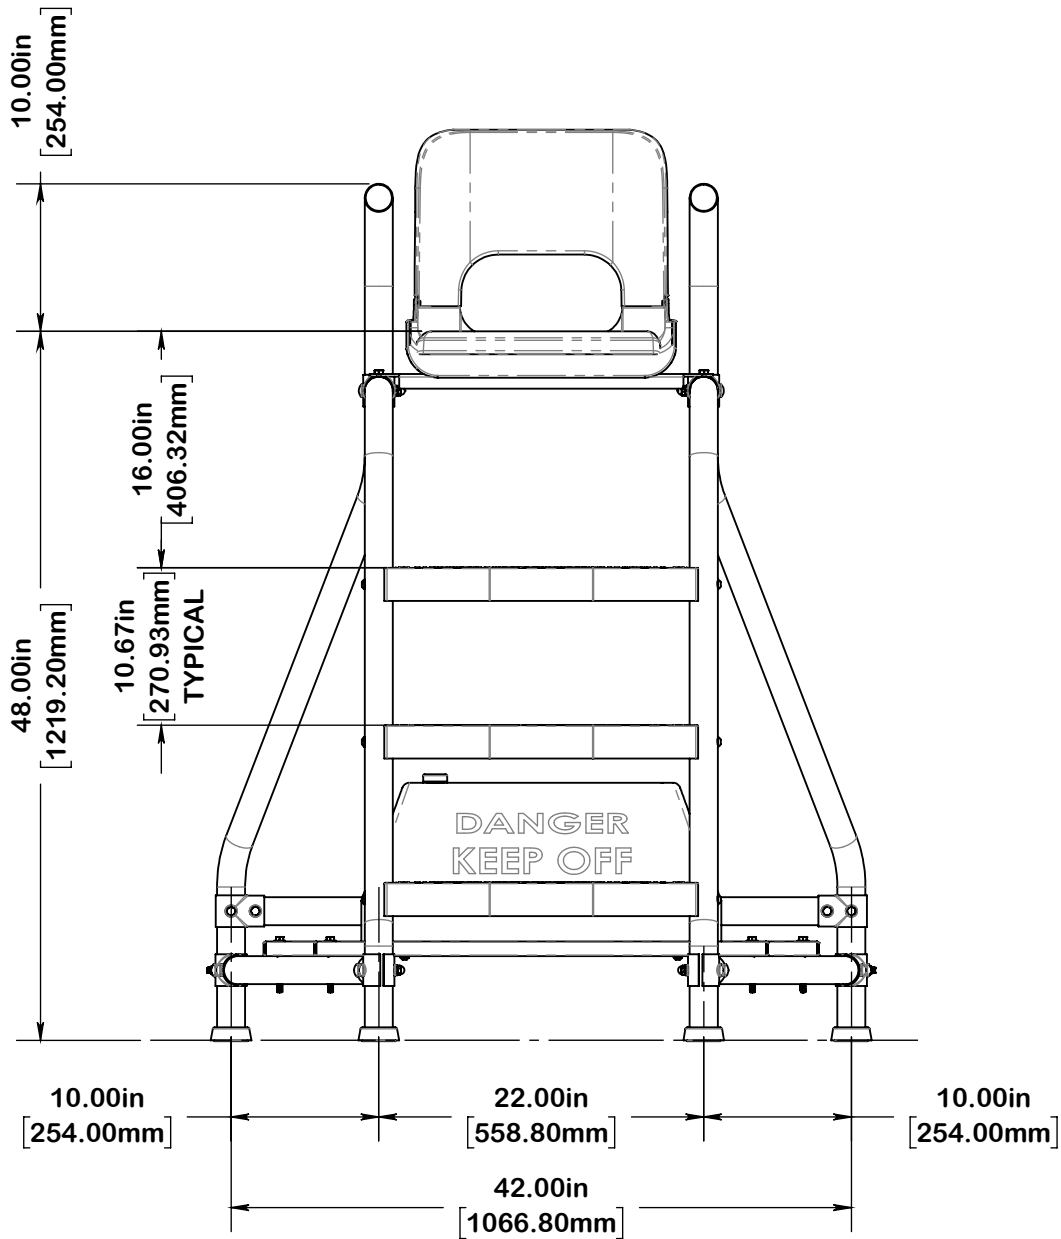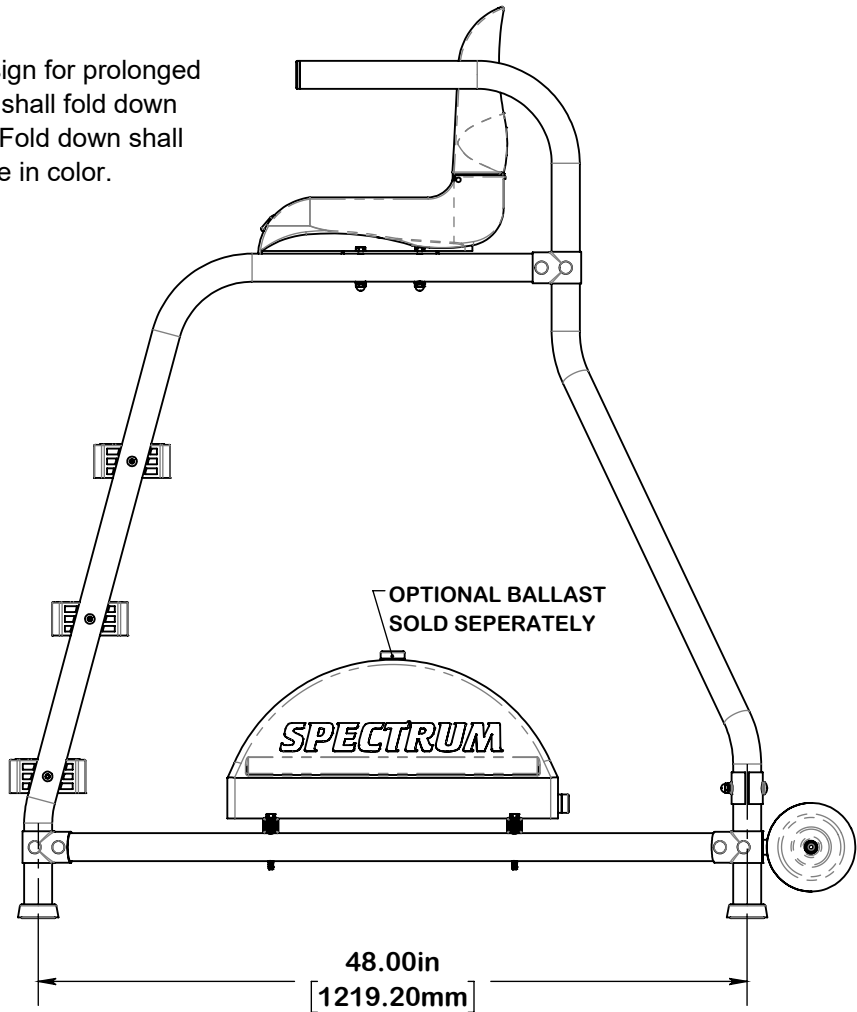

7100 Spectrum Lane Missoula, Montana 59808
800.791.8056 www.spectrumaquatics.com

ENGINEERING DATA

PRODUCT:	GC - 4'-0" MARSHALL 1.90 -		
MODEL #:	36533	REVISION:	A
MATERIAL:	1.90"x.065" 304L S.S. ROUND TUBE		
FINISH #:	600 GRIT		

NOTE:
⚠ DIMENSIONS VARY WITH SPECIFIC APPLICATIONS. SPECIFICATIONS ARE NOMINAL AND ARE SUBJECT TO CHANGE. PLEASE CONTACT SPECTRUM AQUATICS FOR CUSTOM APPLICATIONS